

# AIM BTU 500 & 800 Ozone Generators



AIM BTU 500 and 800 use our cold-spark corona discharge technology redesigned into a smaller overall package with a handsome black powder coating for improved appearance. The systems are engineered for consistent ozone output. By using tubular technology, there are no plates or screens to clog up or short out making sure it's ready when you need it. Plus, the rugged line voltage circuitry is designed for optimum performance.

## Perfect for the following applications:

- Water treatment
- Cooling towers
- Well water
- Swimming pools & spas
- Bottled water

## ELECTRICAL:

65 Watts  
115/60/1 ph

## OZONE OUTPUT:

Up to 8 grams per hour @ 12 SCFH


\* Ozone production calculated @ 2% concentration by weight and 70 °F ambient temperature using oxygen feed gas.

## DIMENSIONS:

9"W x 27.5" H x 10" D  
AIM BTU 500 & 800 Shipping Weight: 45 lbs.



SKU	Description
30327	AIM BTU 500-115 v
30327-01	AIM BTU 500-220 v
30328	AIM BTU 800-115 v
30328-01	AIM BTU 800-220 v

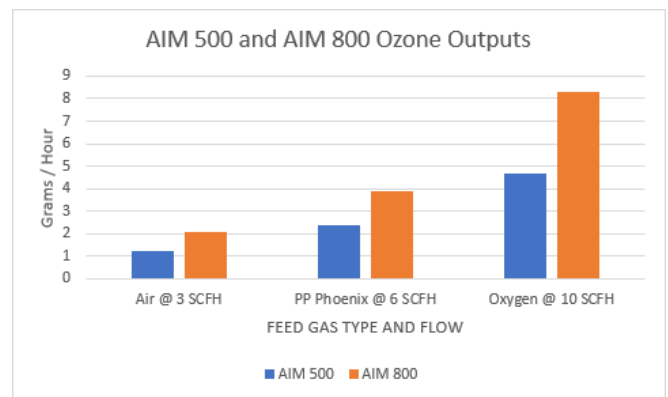

**WARNING:** This product can expose you to chemicals, including mercury, which is known to the State of California to cause birth defects or other reproductive harm. For more information, go to [www.p65Warnings.ca.gov](http://www.p65Warnings.ca.gov).

# OZOTECH