

Intake Air Dryer Cartridge Kit

The DI-Air Dryer Kit comes with everything you need to attach the DI Air Dryer to the EOG unit. Once attached to the EOG, the DI Dryer reduces maintenance due to moisture entering the ozone generator. Replacement dryers can be purchased separately from the kit.

FEATURES & BENEFITS

- Easily installed
- Media can be regenerated
- Dry air reduces the build up of nitric acid in the EOG
- Helps EOG to produce ozone more effectively
- Reduces moisture entering the EOG for optimum perform.
- Ideal for humid locations




Intake Air Dryer Cartridge Kit

SKU	Model
47047-01	Intake Air Dryer Cartridge Kit
47047-01R	Replacement Cartridge

WARNING!
High Voltage!

Be sure to disconnect power to EOG II unit before servicing.

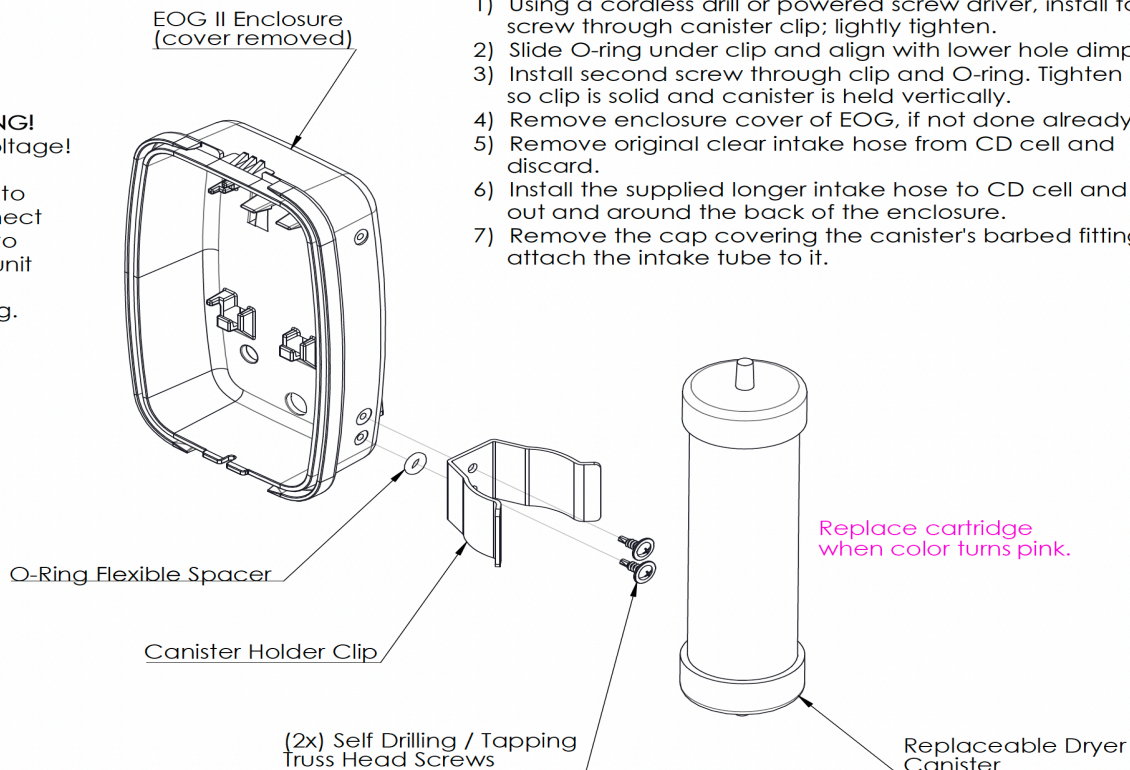

EOG II Cartridge Dryer Installation Instructions:

- 1) Using a cordless drill or powered screw driver, install top screw through canister clip; lightly tighten.
- 2) Slide O-ring under clip and align with lower hole dimple.
- 3) Install second screw through clip and O-ring. Tighten screws so clip is solid and canister is held vertically.
- 4) Remove enclosure cover of EOG, if not done already.
- 5) Remove original clear intake hose from CD cell and discard.
- 6) Install the supplied longer intake hose to CD cell and route out and around the back of the enclosure.
- 7) Remove the cap covering the canister's barbed fitting and attach the intake tube to it.